



SUBLI-MATE®



EN

SUBLI-MATE offers a broad portfolio of products suitable for various printer types and speeds to cover a wide range of applications.

It is used in various industries such as fashion, sportswear, home textiles and soft advertising banners.

☒ Excellent


☐ Good

☐ Standard

Product	GSM	Ink coverage	Transfer yield	Dry speed	Available width
SUBLI-MATE Expert	45, 57	☒	☒	☐	< 1,62 m
SUBLI-MATE Origin	70	☒	☒	☒	< 1,62 m
SUBLI-MATE Quick-dry	73	☒	☐	☐	< 1,62 m
SUBLI-MATE Eco	38, 45, 50, 60, 95	☒	☐	☒	< 3,28 m

* All Hansol products are sold with the understanding that each purchaser will independently determine the suitability of any product for the purchaser's intended application.

SUBLI-MATE[®] Eco

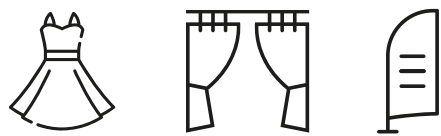

EN

SPECIAL FEATURES

- Cost efficient
- Available in rolls of up to 3.28 m in width

TYPICAL APPLICATIONS

- Fashion
- Sportswear
- Home textile

FIVE-POINT SCALE

- Ink Coverage
- Transfer Yield
- Dry Speed

RECOMMEND TRANSFER SETTINGS

- Temperature: 195~205 °C
- Time: 30~40 sec

PRODUCT RANGE

	Physical properties	Unit	Value					Test method
	Basis weight	g/m2	38 ± 3	45 ± 3	50 ± 3	60 ± 3	95±5	KS M ISO 536
	Thickness	µm	50 ± 3	62 ± 3	70 ± 3	81 ± 3	112±5	KS M ISO 534

* All Hansol products are sold with the understanding that each purchaser will independently determine the suitability of any product for the purchaser's intended application.

